



Device description

PX814 is a professional AC class dimmer with built-in 24 outputs each with a power of 3600W.

The device is powered from three phases and has a system that completely protects against the effects of reverse phase connection. The dimmer allows to control from 6 different sources simultaneously:

- 2 x DMX-512
- 3 x Art-Net
- 24 x analogue inputs (option available to order)

AC + Dimmer is equipped with a color touch screen, four buttons and a knob. Using the buttons and the knob, you can easily navigate through the intuitively prepared menu, in which it is possible to set all the dimmer parameters and view the dimmer status.

CHANNEL 1	
MERGED VALUE: 0	
MERGE:	DMX1
DMX 1:	1
DMX2:	1
ARTNET A:	1
ARTNET B:	1
ARTNET C:	1
ANALOG:	1
OUTPUT:	0,0%
LOAD:	0,0A
FUSE:	OK
MAX POWER:	3,6kW

PX814 has a built-in merger system with an option to select one of 13 priorities, including permanent activation of any circuit, regardless of the controls. Advanced electronics allow to address each output channel in any way and graphically edit the characteristics of its control (5 characteristics implemented by default and 5 set by the user). The device in option (PX814-B) has switches (On / Off) at each of the outputs that allow manual activation of the output at 100% (the so-called Bypass) – the supply

current flows directly to the output bypassing the controller system.


The dimmer also allows to set output voltage and current limits for each channel separately. It is also equipped with a bulb heating system (10 levels) and control of the attached fuse and broken circuit / burnt bulb. The reaction to DMX signal loss can be defined by the user. In addition to the basis options (*ON*, *OFF*, *HOLD*, *SLOW TURN OFF*), 64 stages and the program are available to be defined.

Built-in "soft-start", "soft-on" and "even-off" systems ensure reliable operation in harsh conditions. Direct detection of zero of the network and optical insulation of DMX input guarantee high resistance to interface.

PX814 has a solid metal housing with an efficient cooling system, adapted for wall mounting.

NOTE! The device should be installed in a technical room.

Software is available for the device that can be downloaded from the manufacturer's website (<https://pxm.pl/>), which allows to connect with up to 16 dimmers at once. The application allows live view of the device operating parameters, individual channels and configuration changes.

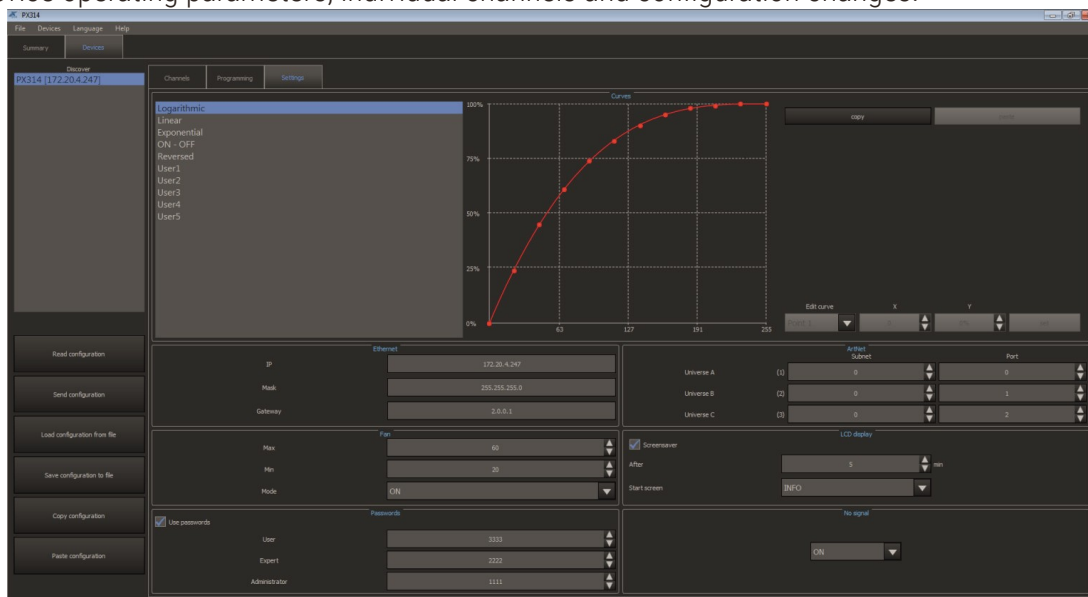

Models available


Below is a description of the PX814 model markings with their explanation:

PX814
 PX814 – ½
 PX814 – B
 PX814 – B – ½
 PX814 – R
 PX814 – R – ½
 PX814 – R – B
 PX814 – R – B – ½

- the standard version has 24 outputs protected by two residual current circuit breakers,
- **B** – a cabinet with switches at each output (so-called Bypass) – the supply current flows directly to the output, bypassing the regulator circuit,
- ½ – the cabinet have 12 outputs (half of the standard version),
- **R** – each output is individually protected by a residual current device.

Version on request

- additional 24 analog inputs when using three PX235 modules

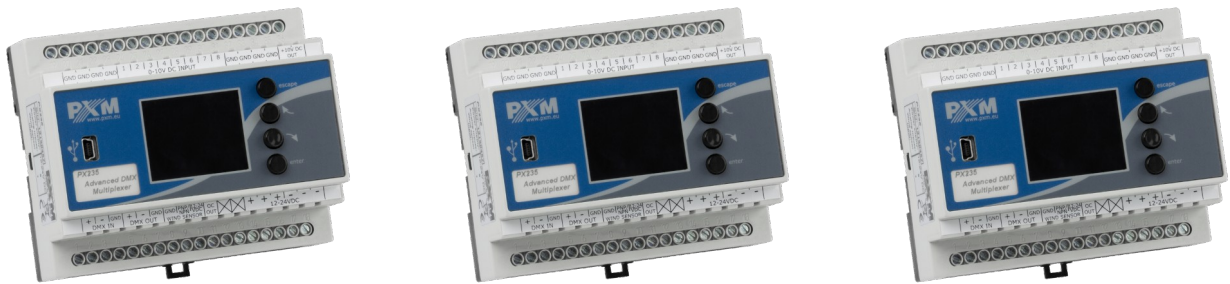



- additional PX387 SwitchDimm DMX Controller module, which allows for smooth control of the circuits or in the "on / off" mode with a dedicated smartphone application (with Android™)




- version with continuous resistive load per channel: 1300W or 2300W

Up-slope time at the interference suppression choke: $\sim 380\mu\text{s}$

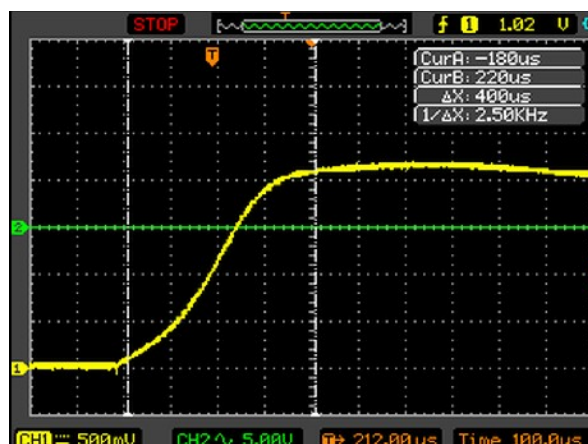

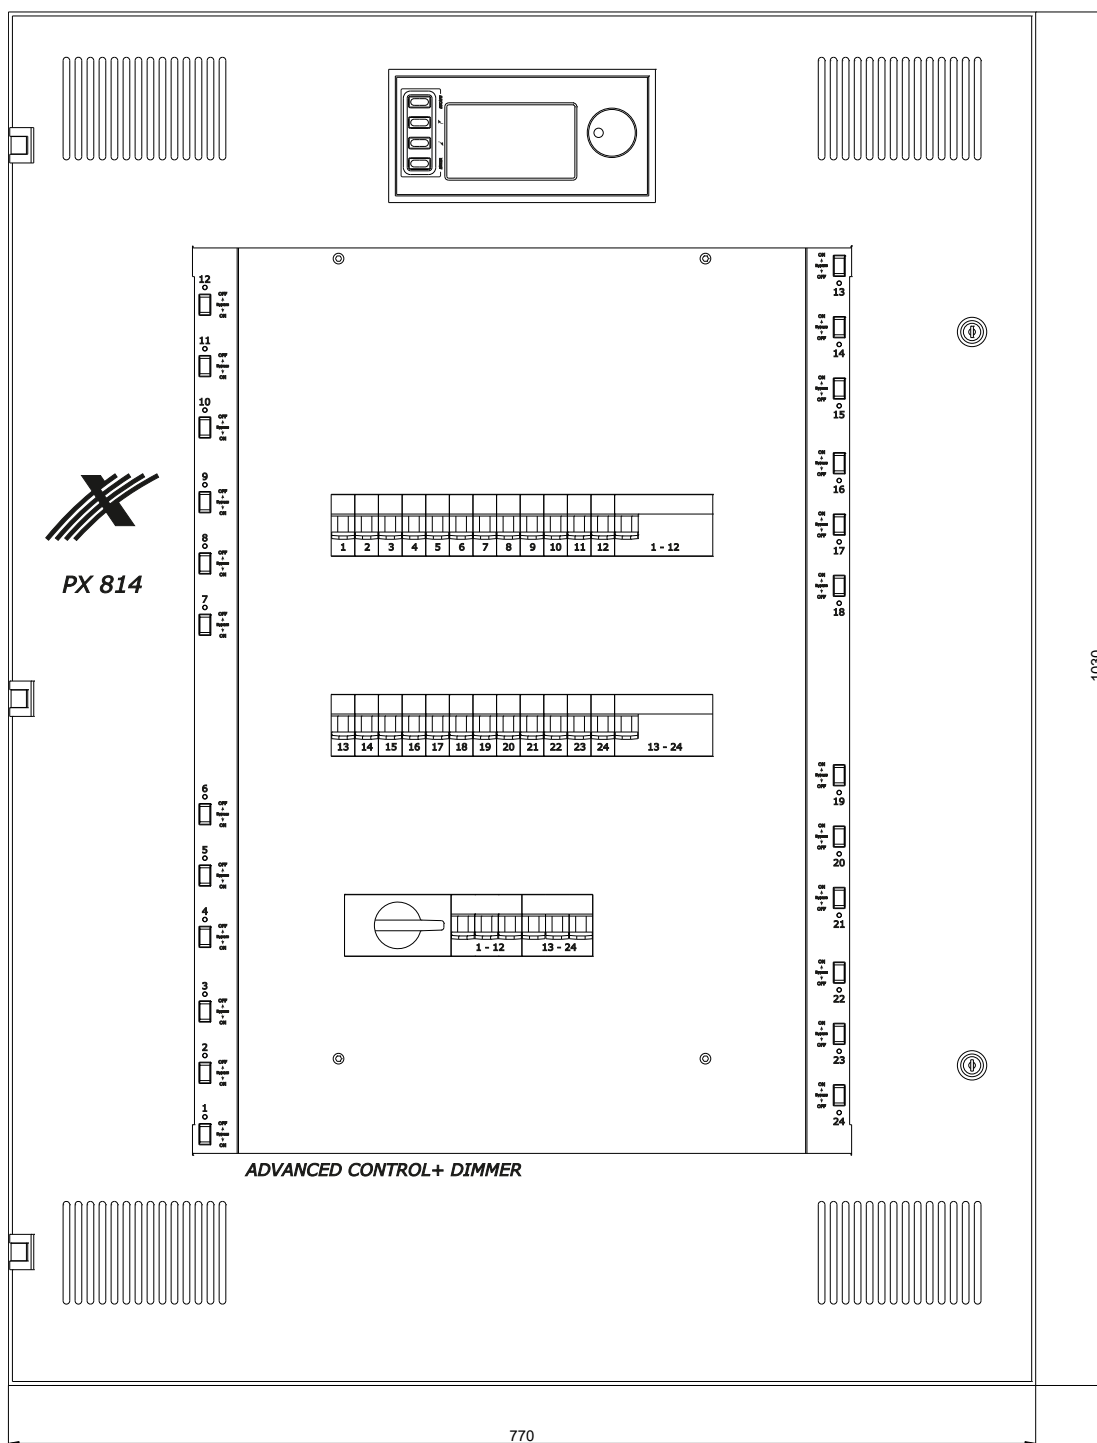

Connection diagram

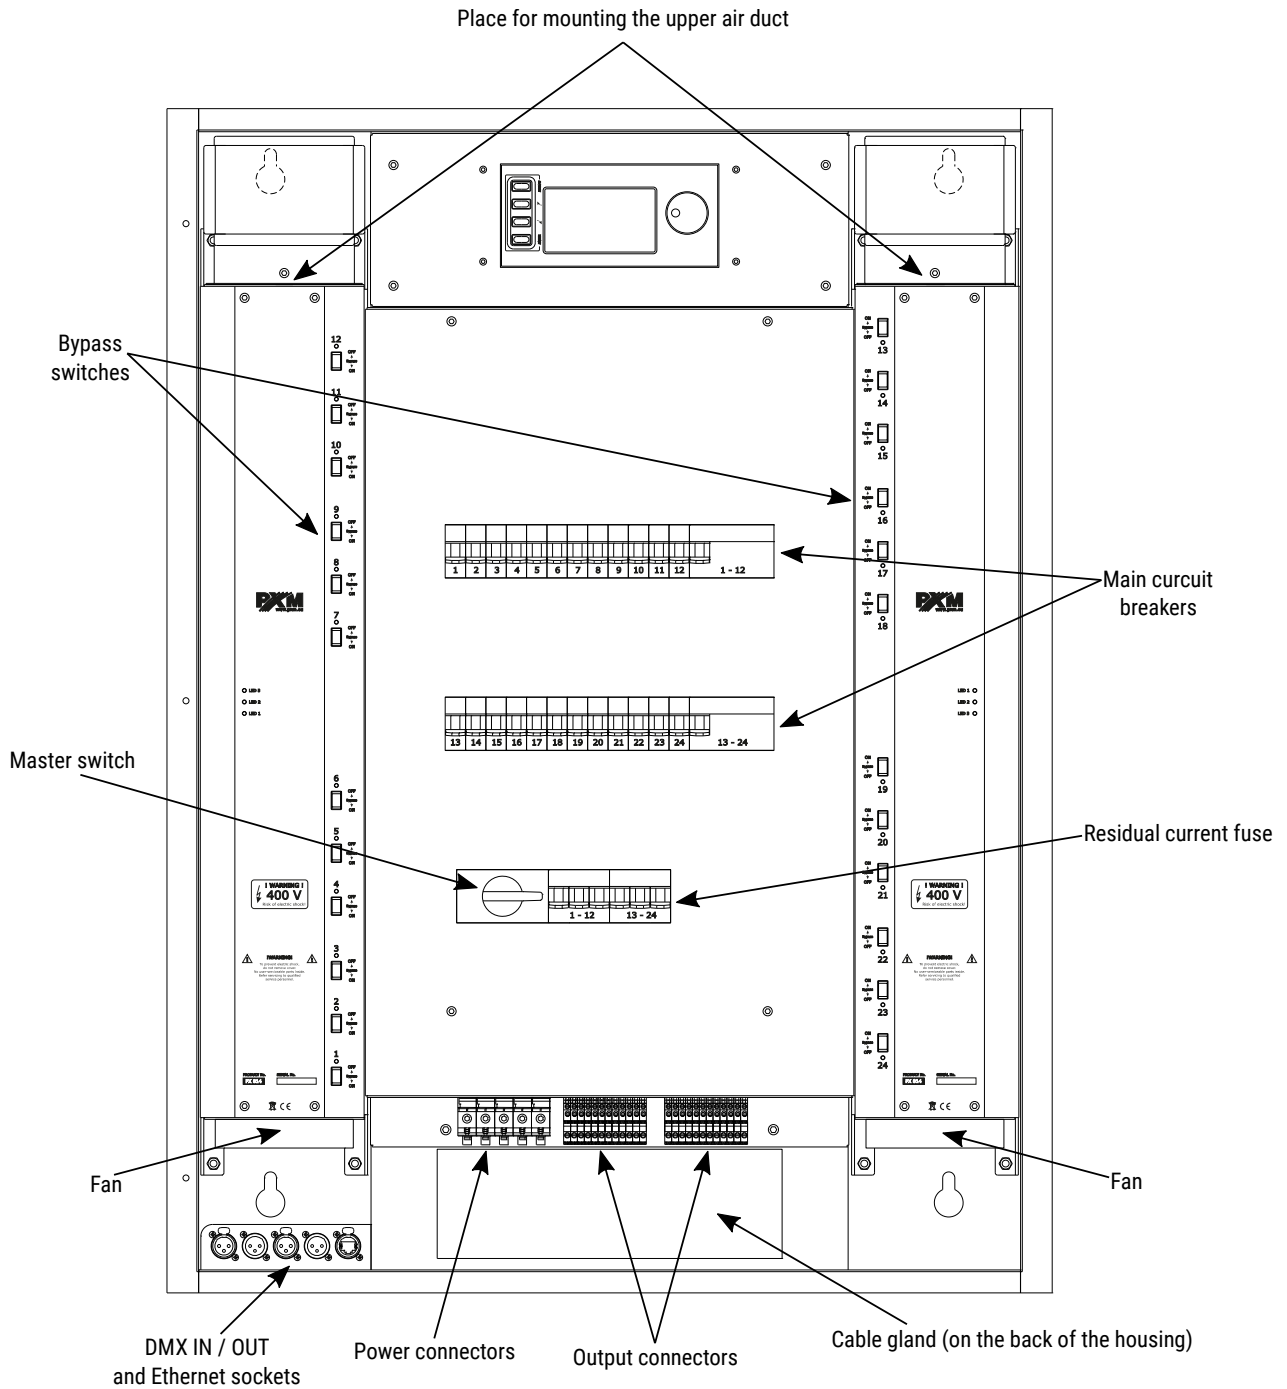

Technical data

type	PX814
DMX input lines	2
Art-Net Universe	3
optically insulated DMX line	yes
circuit break detection	yes
overvoltage protection of DMX line	yes
faulty circuit control	yes
residual current protection	yes (the ability to protect each circuit individually in option – R)
resolution of control	8 or 16 bit
touch screen resolution	480 x 272px (4,3")
preheat	yes
input merge	yes (13 priorities)
output power limiter	yes
attenuation	according to standard PN-EN 55014
output carrying capacity	3600W – continuous resistive load 2400VA – continuous inductive load (conventional and neon transformers)
output protection	full electronic protection + automatic 16A fuses
built-in master switch	yes
fans	electronic control
acoustic emission level	≤ 50dB (at a distance of 1m from the housing)
input slots	35mm ² terminals
output slots	4mm ² terminals
power supply	3-NPE AC 400/230V / 50Hz
current consumption	3 x 128A (at full load)
weight	75kg
dimensions	width: 770mm height: 1030mm depth: 172mm

NOTE! The information contained in the Technical data relates to the standard version (24 x 3600W).

“Art-Net™ Designed by and Copyright Artistic Licence Holdings Ltd”

