



Device description

The PX345 DMX Controller is an advanced architectural lighting controller that allows for controlling even the most complex lighting systems.

With programmable functions, the device enables the control of lighting, multimedia, and other devices that are operated based on the DMX protocol. After the configuration, the controller operates independently.


The controller has 1 DMX output line (128 channels) and it allows for triggering multiple configuration items at the same time. Events can be triggered by an astronomical clock, a real time clock, programmed timers, digital inputs, mobile device applications or via the Modbus protocol.

An advanced PC PxDesigner application (Windows®) allows for programming the device. The application has a built-in library of devices that can be distributed on a graphic project, which facilitates the creation of complex light shows, including ones that are synchronized with sound.


The controller comes with an application for mobile devices (Android™, iOS), which enables simple control.

The controller can be used to create up to 4 (including ADMIN) users with different access rights. There is an option to remotely log on to the controller from the external network.

Technical drawing

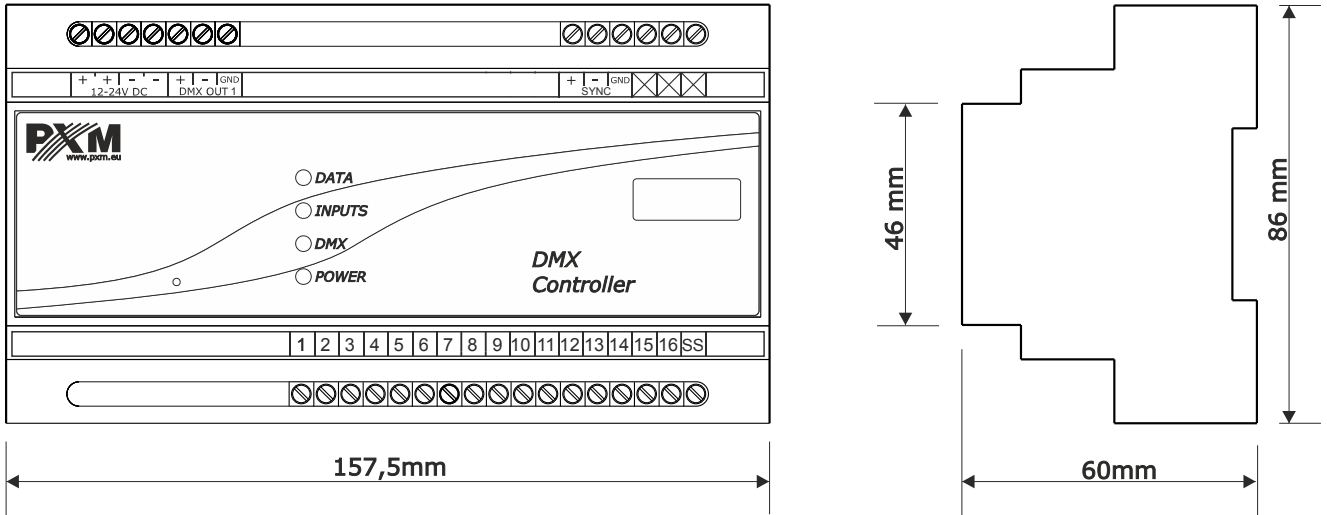

Connection diagram

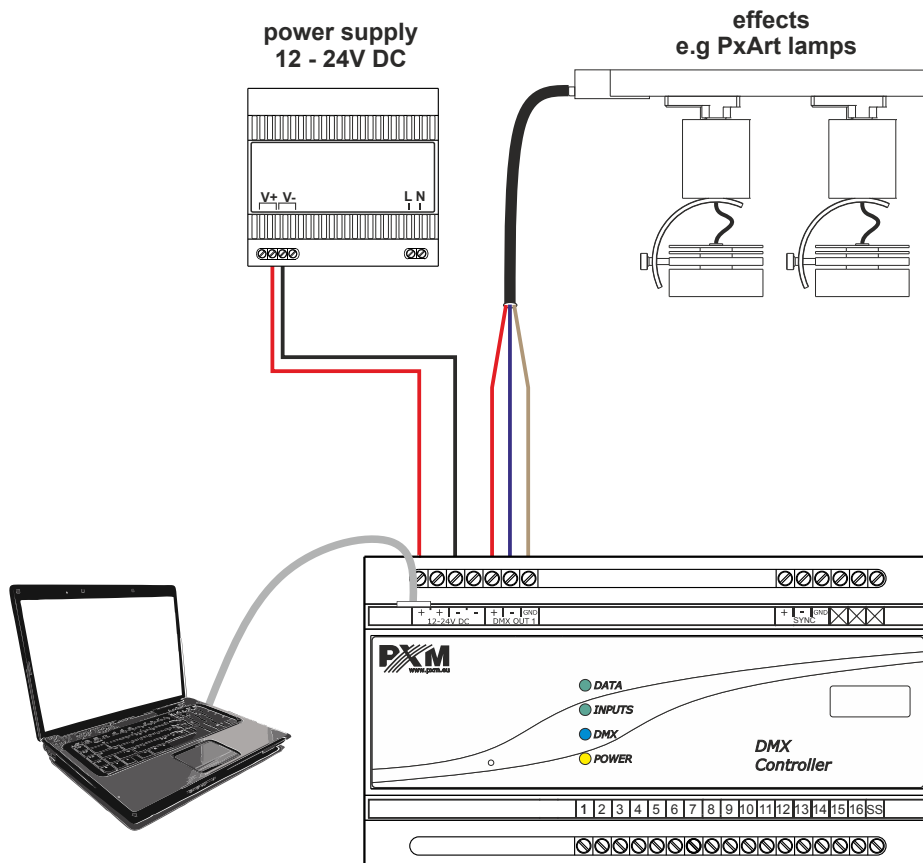

Technical data

type	PX345
power supply	12 – 24V DC
max. current consumption	400mA
DMX output	1 (128 channels)
control inputs (on / off)	16
Ethernet port	1
Real Time Clock (RTC)	yes
Modbus	TCP
scenes and programs steps	251000
number of scenes running simultaneously	max. 200
programs	512 (max. 40 simultaneously)
sequences	128
statuses	256
timers	1024
zones	16
users (including ADMIN)	4
weight	0.3kg
dimensions	width: 157.5mm (9 DIN rail modules) height: 86mm depth: 60mm