



DMX/0-10V Interface 1ch

Product description

The PX385 module is used to process DMX-512 signal to analogue control 0 - 10V or 1 - 10V with a relay (Relay Mode).

The DMX/0-10V Interface 1ch has a DMX connector and 1 output voltage channel.

PX385 can be controlled using a DMX signal (the device has a built-in DMX-512 signal receiver), and it can operate independently. The DMX address for the device is set manually using the DIP switch located on the housing with the RDM protocol or using the PX277 configurator. What is more, the user can set the output value if a DMX signal is lost.

In addition, the device supports the RDM protocol.


The device is manufactured in an aluminium housing. Upon request PX385 is available in a version with IP65, and is sealed in a hermetic housing – the number of cable glands depends on the customer's needs, and is determined when placing an order.

The device is powered by 230V AC.

Technical Data

Type:	PX385
Power supply:	230V AC
Number of output channels:	1
0-10V output load capacity:	max. 10 mA
Relay output load capacity:	
resistive load	max. 2A, 250V AC
inductive load	max. 0.5A, 250V AC
Output sockets:	screw terminals
Weight:	0,18 kg
Dimensions:	Width: 44,2 mm Height: 35,5 mm Length: 143,4 mm

Connection diagram

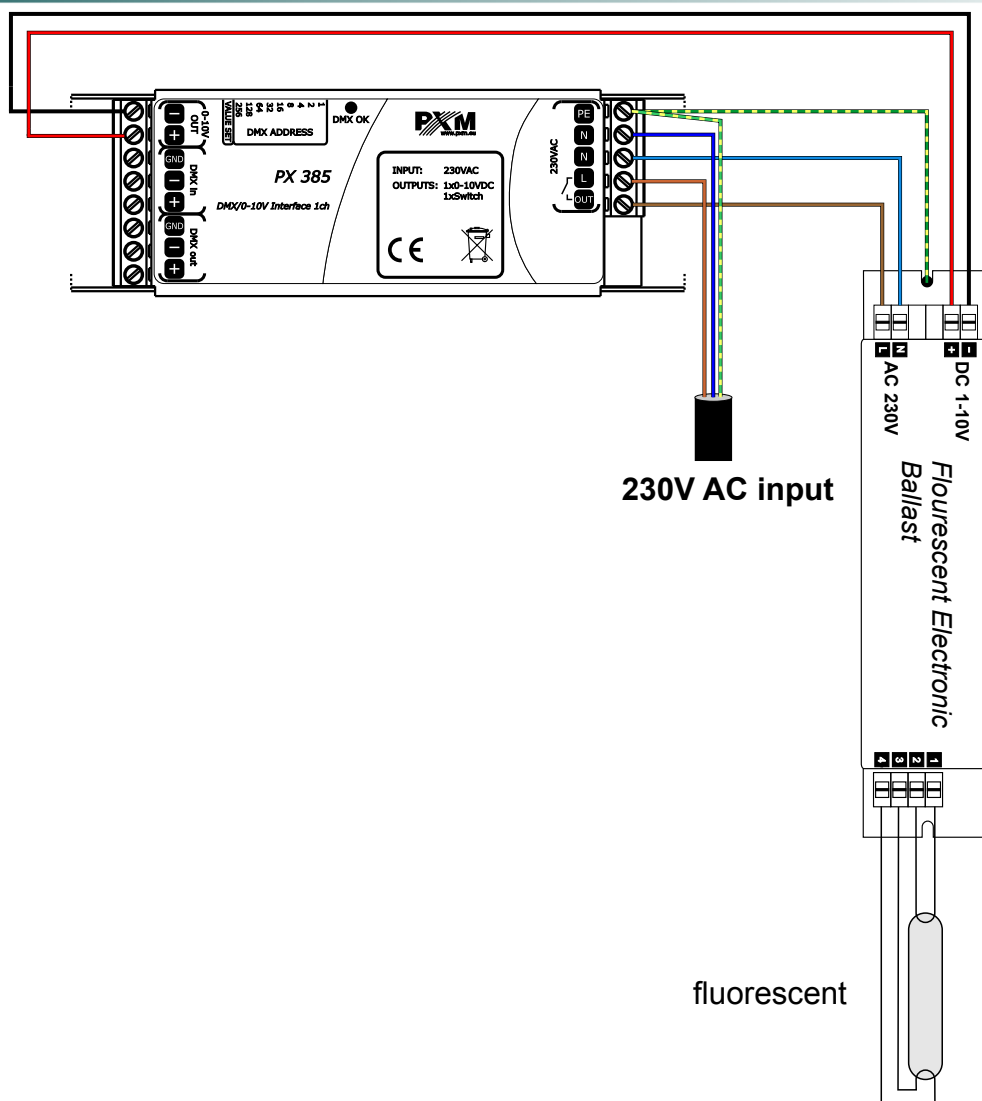

Technical drawing

