

DATA SHEET



PxSound

Product description

PxSound is a component of sound system designed for mounting on GLOBALtrac control.

The device consists of a speaker, amplifier and WAV file player. The whole is connected to the control bus GT using adapter (included).


The PX348 allows you to play audio tracks anywhere in the room equipped with a busbar system without the need for additional installation. The system can be controlled by any controller operating in the standard DMX-512.

Functions performed by the PX348 using DMX control allow for playback, the choice of a particular song, looping single and multiple tracks and fluently adjust the volume. In addition, using the PX277 (PxArt Controller Settings) you can adjust the bass and treble, and set the DMX address. PxArt Controllermenu also allows you to define the behavior of the player in the absence of DMX signal.

Technical data

catalog number	PX348
power supply:	230 V AC
max. power consumption:	4 W
max. midband power output:	10 W
audio digital format:	WAV
audio media cards type:	SD / SDHC
max. supported number of tracks	85
control protocol:	DMX-512
number of control channels:	4
manual control:	YES (using PX277)
DMX-512 control LED:	YES
mounting:	GLOBALtrac Control bus-bar
available housing colors:	silver, black or white
weight:	3,6 kg
dimensions:	width: 190,5 mm height: 378 mm diameter of loudspeaker: 148 mm

SD / SDHC card slot and a socket for programming of the PX348 parameters



Ver: PX348_D_en_1-0











Connection scheme

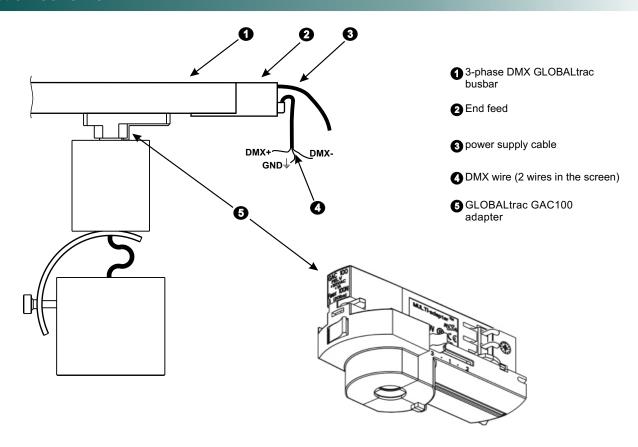

Dimensions - technical drawing

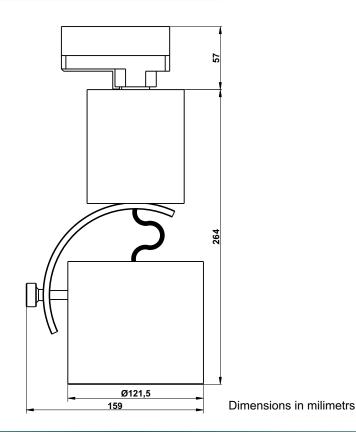







tel: +48 12 626 46 92 fax: +48 12 626 46 94